

OCXO SERIES 5100

■ FEATURES

Miniature OCXO in modified CO-15 package

Low current consumption

Frequencies up to 155.520 MHz

■ ELECTRICAL PERFORMANCE


PARAMETER	OCXO SERIES 5000	
	AT CUT CRYSTAL	SC CUT CRYSTAL
Supply voltage, nom.	5V \pm 5% (3.3V Optional)	
Power dissipation steady state	1.5 Watt Max.	
Heat up power	3 Watt Max	
Heat up time.	3 min Max	
Frequency range	1 To 155.520 MHz Standard	
Frequency Adjustment	\pm 10PPM Min (0 to 5V)	\pm 0.7PPM Min (0 to 5V)
Freq. stability vs. temperature LX: 0°C to 60°C FZ: -30°C to 70°C D3: -40°C to 85°	\pm 0.05 PPM \pm 0.1 PPM \pm 0.25 PPM	\pm 0.01 PPM \pm 0.02 PPM \pm 0.03 PPM
	(Standard, contact factory for different temp ranges and stabilities)	
Freq. stability vs. supply changes	\pm 0.015 PPM Max for \pm 5% Change	\pm 0.010 PPM Max for \pm 5% Change
Freq. stability vs. load changes	\pm 0.01 PPM Max for \pm 5% Change	\pm 0.005 PPM Max for \pm 5% Change
Long term stability (Aging)	\pm 4 PPM Max for 10 Years \pm 0.005 PPM/Day Max.	\pm 1 PPM Max for 10 Years \pm 0.002 PPM/Day Max.
Output	HCMOS/TTL/Sine 0 to +7dBm (Low voltage CMOS Available)	
Harmonics	-30dBc(Sine Output)	
Spurious	-75dBc(Sine Output)	
Duty cycle	40/60% to 60/40%(HCMOS)	
Rise / fall time	10nS Max. (HCMOS, 10%~90%Vout, 90%~10%Vout)	
Short term Stability	1 E-10 /Sec	5 E-11 /Sec
Phase Noise	Offset Phase Noise 10Hz -90 dBc/Hz 100Hz -125 dBc/Hz 1000Hz -135 dBc/Hz 10000Hz -150 dBc/Hz	Offset Phase Noise 10Hz -110 dBc/Hz 100Hz -125 dBc/Hz 1000Hz -140 dBc/Hz 10000Hz -150 dBc/Hz

■ **HOW TO ORDER (PART NUMBER)**

Prefix	Output Type	Cut Type	Series	Revision	Temperature Range	Stability	Frequency
OX	2:HCMOS 4:LVCMOS 6:SINE	0:AT (No Vcontrol) 1: SC (No Vcontrol) 4: AT (Elect Vcontrol) 5: SC (Elect Vcontrol)	50:5000	A	First letter Lowest Temperature, Second letter Highest Temperature: From A=-55°C to Z=+70°C, Then: 1=+75°C, 2=+80°C, 3=+85°C... in 5°C steps Example: LZ: +0°C to +70°C LX: +0°C to +60°C FZ: -30°C to +70°C D3: -40°C to +85°C	Value x 10E-2 in PPM Example 28= 0.28PPM M 10= 0.1PPM	In MHZ

Example:

OX2551A-LZ- 3 -10.000

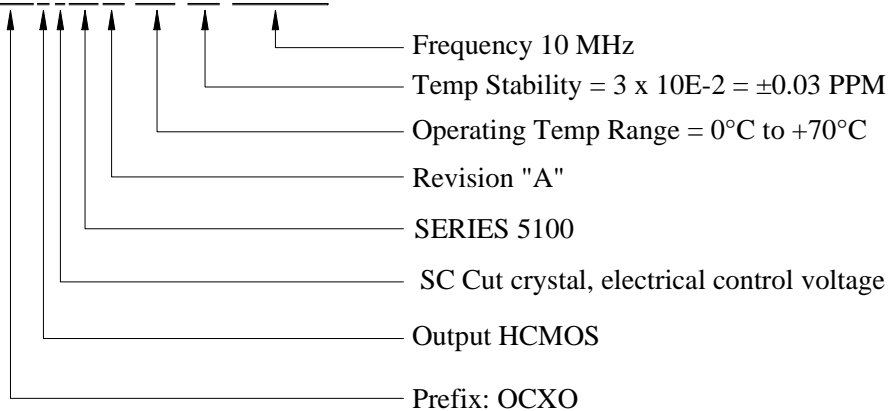

■ **MECHANICAL SPECIFICATION**

